


## MOTOR DRIVEN SIREN GP12 145dB IP55 415VAC

GP12 three phase motor driven siren 415V AC, 145dB @1 metre

- Audibility range from 127dB to 145dB at 1m
- Cast aluminium and steel construction
- Omni-directional sound coverage

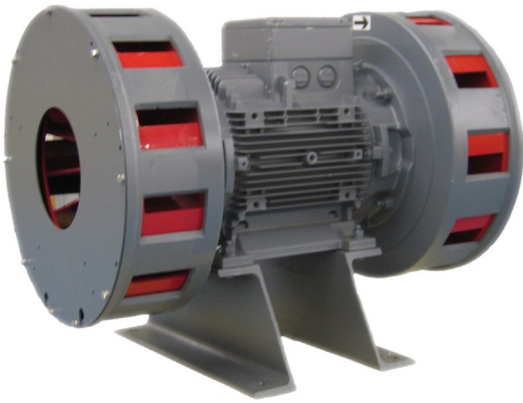

Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS

Un, Nominal Operational Voltage, AC	415 V AC
Sound Level @1m	145 dB @1m
Sound Mode	Continuous mode
IP Rating	IP55
Mounting	Surface Mount
Current Draw	18.1 A
Current Draw (start-up current)	145.1 A
Material	Aluminium
Operating Temperature, Min	-20 °C min
Operating Temperature, Max	55 °C max

### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-